



PAJ GROUP

DEVELOPMENT OF ADVANCED MECHATRONICS

www.paj-sensor.com

11881-901 version 1.36

WATER IN OIL SENSOR (WIO) Product Overview

The WIO-Sensor technology is a secure on-line system monitoring the water content in oil. Water or moisture is the second largest contamination (after particles) in oil systems with damaging effects on the life time of both the machinery and the oil. Moisture is damaging to engine parts, cylinders, bearings, etc. with resulting mechanical failures and therefore repairs and expensive downtime costs (often ranging between EUR 10,000 – 200,000).

The amount of water a specific oil type can dissolve varies significantly, depending on e.g. the base oil, additives, oxidation, temperature and other factors. The sensors thus require a comprehensive calibration to measure the water content correctly. PAJ sensors have the highest quality and accuracy levels in the industry through elaborate oil calibration & testing methods.

While conventional approaches require taking a small sample of the oil and then analysing it, the sensor provides continuous monitoring of the entire lubricant oil volume, providing early warning of high levels of water content that could damage the machine. As well as providing advance warnings of problems, it can also be used to ensure that separators, filters and driers are only running when actually needed. The sensor is available with an associated terminal box. The terminal box provides power to the sensor, links the sensor to any external condition monitoring system, gives alarms and provides a local visual indication of the water level in the oil.

WIO Sensor



Terminal Box



Oil Types	Applications	Industries	Product Features
<ul style="list-style-type: none"> Lube Gear Box Turbine Diesel Hydraulic Transformer 	<ul style="list-style-type: none"> Oil systems Gear boxes Turbines Transformers Compressors Hydraulics Ventilation Cooling systems Pumps Others 	<ul style="list-style-type: none"> Marine Power Processing Offshore Renewables Steel Food Paper Mining Agriculture Robotics Others 	<ul style="list-style-type: none"> 24/7 monitoring Highest measuring accuracy Robustness (for heavy use) GL approved MAN Diesel Approved Calibration certificate Analogue output or MODBUS Configuration to exact needs Thread or ball valve installation Galvanic isolated High grade cables Optional LED buttons & displays Customised alarm settings Easy installation

CUSTOMER BENEFITS

- **24/7 monitoring and early warnings (allowing preventive actions)**
- **Increased lifetime of engine parts, cylinders, bearings, etc.**
- **Saved damages and downtime costs**
- **Longer oil lifetime**
- **Saved oil sample costs (and administration)**
- **Potential savings on water filters, separators, etc. (only running when needed)**
- **Avoided commercial costs and negative customer impact (from downtime and delays)**
- **Higher accuracy than most oil sample tests and real time answers**



WATER IN OIL SENSOR PRODUCT RANGE

The sensor is simple to install and easy to connect. It provides a measurement range of 0.01-1.00aw, with accuracy of $\pm 0.03aw$ and a resolution of better than 0.004aw. The relay alarm contacts are rated for 250V AC by installation with the Terminal Box, with the default alarm settings being 0.50aw and 0.90aw (both adjustable). The sensor works with oils at up to 20 bar pressure with the standard installation, and up to 10 bar pressure with the ball valve installation, and from 0°C to 90°C.

With the standard fitting or ball valve version the WIO sensor can be quickly installed - either as retrofit or in new installations. The sensor functions with or without the terminal boxes. With the many different terminal box configuration possibilities it is easy to configure the systems for the exact customer requirements.

WIO Standard 200B to 500



WIO200B

- 24VDC $\pm 10\%$ power supply
- 2 x NC relay outputs 60VAC/1A
- 1 x galvanic isolated analog output 4 - 20mA
- fixed alarm points HA-0.50 aw, HHA 0.90 aw
- manual test function

WIO400

- 24VDC $\pm 10\%$ power supply
- 2 x NC relay outputs 60VAC/1A
- 2 x galvanic isolated analog output 4 - 20mA
- RS485 modbus user interface
- adjustable alarm points for HA and HHA (aw/PPM)
- manual test function

WIO Ball Valve 200B to 500



WIO300

- 24VDC $\pm 10\%$ power supply
- 2 x NC relay outputs 60VAC/1A
- 2 x galvanic isolated analog output 4 - 20mA
- RS232 modbus user interface
- adjustable alarm points for HA and HHA (aw/PPM)
- manual test function

WIO500

- 24VDC $\pm 10\%$ power supply
- 2 x NC relay outputs 60VAC/1A
- 2 x galvanic isolated analog output 4 - 20mA
- CANopen modbus user interface
- adjustable alarm points for HA and HHA (aw/PPM)
- manual test function

Extended with WIO300-500 TERMINAL BOX



- 24VDC $\pm 10\%$ power supply
- 2 x NO relay outputs 250VAC/2A
- 2 x galvanic isolated analogue output 4 - 20mA
- RS232/RS485/CANopen user interface
- adjustable alarm points for HA and HHA (aw/ppm) via com.-bus
- 4 digit indication display for aw/ppm
- 4 digit indication display for °C/F
- LED indication for H/HH-alarm
- Push button function for H/HH alarm
- Acoustic indication for H/HH alarm

Extended with WIO200B TERMINAL BOX



- 24VDC $\pm 10\%$ power supply
- 2 x NO relay outputs 250VAC/2A
- 1 x galvanic isolated analogue output 4 - 20mA
- 4 digit indication display for aw/ppm
- LED indication for H/HH-alarm
- Push button function for H/HH alarm
- Acoustic indication for H/HH alarm



PAJ GROUP

DEVELOPMENT OF ADVANCED MECHATRONICS

www.paj-sensor.com

WATER IN OIL SENSOR

WIO-Software

- settings of High-Alarm & HighHigh-Alarm alarm limits
- monitoring of aW and PPM
- monitoring of the temperature
- status indication of the service intervals
- logfile of the measured data
- Easy to install from USB-Stick




DB9 Female
RS232/RS485/
CanOpen to
USB cable



8 pole Male
RS232/RS485/
CanOpen to USB
cable


Ball Valve 16mm

1. Complete solution for WIO-Sensor with internal thread
 2. Complete solution for WIO-Sensor with external thread
 3. Ball Valve part adapter for sealing and retaining
 4. Pipe unit 3/4" with internal thread, for welding
- Easy to install and to use
 - Fixed mounting of WIO-Sensor
 - Able to expand with ISO228/1 G3/4 adapter

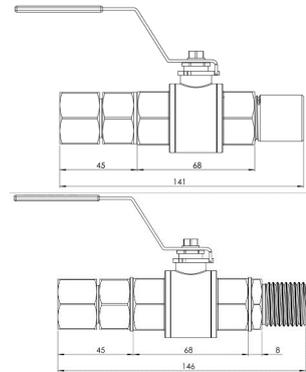


Pipe unit

- Special adapter unit for WIO-Sensors
- Fix mounting and simple solution

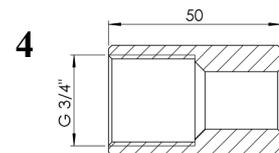

Cable types

- Standard 2 meters
- Can also be ordered as
- 15m, 20m, 30m or 50m.

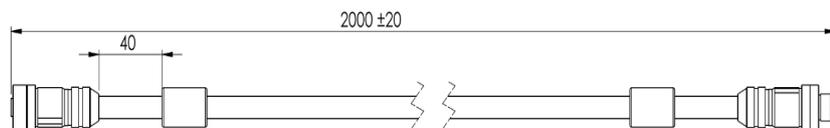



Product list

WI	Water In Oil Sensor					
	L	Lubrication Oil				
	G	Gear Box Oil				
	D	Diesel Oil				
	H	Hydraulic Oil				
	T	Transformer Oil				
	U	Turbine Oil				
		1	Standard sensor pipe 3/4" (inch) Thread with Short pipe			
		2	Standard sensor pipe 1/2" (inch) Thread with Short pipe			
		3	Sensor Ball valve pipe 1/2" (inch) Thread with Long pipe			
		4	Sensor Ball valve pipe 3/4" (inch) Thread with Long pipe			
		A	No user interface (WIO200B)			
		B	RS232 Modbus user interface (WIO300)			
		C	RS485 Modbus user interface (WIO400)			
		D	CanOpen Modbus user interface (WIO500)			
		50	Standard High-Alarm 0,50 aW			
		xx	xx must be from 10 to 80 (0,10 – 0,80 aW)			
		90	Standard HighHigh-Alarm 0,90 aW			
		xx	xx must be from 20 to 90 (0,20 – 0,90 aW)			
WI	L	1	A	50	90	This is an order example of standard WIO200B 3/4" sensor
WI	L	2	B	50	90	This is an order example of standard WIO300 1/2" sensor



PAJ GROUP

DEVELOPMENT OF ADVANCED MECHATRONICS

www.paj-sensor.com

TER	Terminal box					
	A B C D		Sensor 200B Sensor 300 Sensor 400 Sensor 500		No user interface RS232 Modbus user interface RS485 Modbus user interface CanOpen user interface	
	A	0 1 2 3 4 5			No button, no display No button, 1 x display aW No button, 1 x display ppm 2 x button , No Display with LED indicator for HA & HHA w/ acoustic alarm 2 x button, 1 x Display aW with LED indicator for HA & HHA w/ acoustic alarm 2 x button, 1 x display ppm with LED indicator for HA & HHA w/ acoustic alarm	
	B / C / D	0 1 2 3 4 5 6 7 8 9			No button, no display No button, 1 x display to indicate aW No button, 1 x display to indicate ppm 2 x button, no display with LED indicator for HA & HHA w/ acoustic alarm 2 x button, 1 x display aW with LED indicator for HA & HHA w/ acoustic alarm 2 x button, 1 x display ppm with LED indicator for HA & HHA w/ acoustic alarm 2 x button, 2 x display to indicate aW and °C w/ LED indicator & acoustic alarm 2 x button, 2 x display to indicate ppm and °C w/ LED indicator & acoustic alarm 2 x button, 2 x display to indicate aW and °F w/ LED indicator & acoustic alarm 2 x button, 2 x display to indicate ppm and °F w/ LED indicator & acoustic alarm	
			A B		Standard 8 pin female & male connector Gland M20	Cable diameter 6 to 12mm
			A		Output/outlet to machinery/control system, Gland M20	Cable diameter 6 to 12mm
				02 15 20 30 50	Standard 2 m cable with female & male connector 2 pieces 15 m cable with female & male connector 2 pieces 20 m cable with female & male connector 2 pieces 30 m cable with female & male connector 2 pieces 50 m cable with female & male connector 2 pieces	
TER	A	0	B	A		This is an order example of a 200B terminal box with Gland M20 connector and no cables
TER	B	1	A	A	02	This is an order example of a 300/RS232 terminal box w/ dis- play and standard 8 pin connector and 2m cables



PAJ GROUP

DEVELOPMENT OF ADVANCED MECHATRONICS

www.paj-sensor.com

ACC	Accessory equipment			
	SW1	Additional USB sticks with SW for Communication with PC and sensor (per USB stick)		
	SW2	USB to DB9 Female cable (for RS232)		
	SW3	USB to DB9 Female cable (for RS485)		
	SW4	USB to DB9 Female cable (for CanOpen)		
	SW5	USB to 8 pole Male cable (for RS232)		
	SW6	USB to 8 pole Male cable (for RS485)		
	SW7	USB to 8 pole Male cable (for CanOpen)		
	PI-1	Complete Ball Valve adapter with no thread, for welding		
	PI-2	Complete Ball Valve adapter with external thread		
	PI-3	Ball Valve part adapter for sealing and retaining part		
	PI-4	Pipe unit 3/4" with internal thread, for welding		
ACC	PI-1	This is an order example of Accessory equipment		

RF	Refurbishment of sensor				
	L	Lubrication Oil			
	G	Gear Box Oil			
	D	Diesel Oil			
	H	Hydraulic Oil			
	T	Transformer Oil			
	U	Turbine Oil			
		1	Standard sensor pipe		
		2	Sensor Ball valve pipe		
		50	Standard High-Alarm 0,50 aW		
		xx	xx must be from 10 to 80 (0,10 – 0,80 aW)		
		90	Standard HighHigh-Alarm 0,90 aW		
		xx	xx must be from 20 to 90 (0,20 – 0,90 aW)		
RF	L	1	50	90	Order example of standard WIO 200B sensor

All PAJ products are trading under PAJs General Terms and Conditions of Sale & Service.

ISO 9001 - ISO 14001 - ISO 13485 - IRIS - IEC 61340-5-1 - IPC A-610 Class 3